


VersaShield® Fire-Resistant Roof Deck Protection

Help improve your roof system's fire resistance while protecting it from damaging moisture with fire-resistant roof deck protection



- Provides a UL Class A rating on most roof systems¹
- Helps protect against dangerous flame spread and penetration into the interior
- Provides a critical layer of extra protection between your roof covering and deck to resist wind-driven rain (or moisture from other sources) that can cause damage to your roof structure

VersaShield® Fire-Resistant Roof Deck Protection

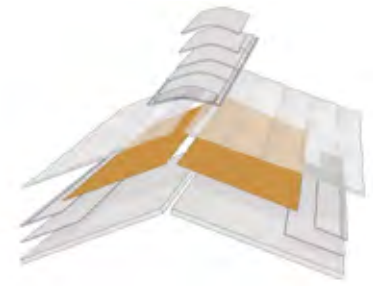

Benefits:

- **Excellent protection** against fire spread and penetration
- **Helps upgrade the UL fire classification of almost any type of roof system**, including upgrading most metal roofs to a UL Class A rating¹
- **An efficient fire-resistant slip sheet** and roof deck protection all in one product
- **Fiberglass-reinforced** so it lies flatter for a better-looking finished roof
- **Slip-resistant walking surface** helps improve traction for installers
- **Light color** provides a cooler working surface (vs. conventional black felts)
- **Eligible for up to a Lifetime[†] limited warranty.** It's also an eligible accessory product in the Roof Deck Protection category of GAF residential enhanced warranties.

VersaShield® Fire-Resistant Roof Deck Protection physical/performance properties

Tensile		
MD	ASTM D146/D828	60 lb./in. width
CMD		30 lb./in. width
Tensile		
MD	ASTM D1922	400 grams
CMD		550 grams
Water vapor transmission		
Permeance	ASTM E96	3 perms minimum
Liquid water transmission test		
	ASTM D4896	Pass

VersaShield® Fire-Resistant Roof Deck Protection Class A rating layer requirements^{*1}

Roofing material	Roof type	Minimum thickness	15/32" plywood	Existing wood shake/shingle	Spaced sheathing
UL Listed Stone Coated Steel	Direct to deck shingle	0.013"	1 Layer	N/A	1 Layer
UL Classified or Listed Steel	Direct to deck shingle	0.013"	1 Layer + 30 Felt	N/A	1 Layer + 30 Felt
Any UL Classified or Listed Steel	Batten required shingle	0.013"	1 Layer	2 Layers	1 Layer
Any UL Classified or Listed Steel	Panel of standing seam	0.015"	1 Layer	N/A	1 Layer
Any UL Classified or Listed Copper	Panel of standing seam	0.016"	1 Layer	N/A	1 Layer
Any UL Classified or Listed Copper	Shingle	0.016"	1 Layer + 30 Felt	2 Layers	1 Layer + 30 Felt
Any UL Classified or Listed Aluminum	Panel or shingle	0.018"	2 Layers	N/A	N/A

^{*}When installed in accordance with section 4.2.1 of GAF ESR-2053, VersaShield® can be used over existing wood shakes or shingles as an alternative of the covering materials specified in 1510.4 of the IBC, section R907.4 of the IRC, or section 1513.3 of Chapter 15 Appendix to the UBC.



To learn more about the Lifetime Roofing System visit gaf.com/Lifetime



Product Details:

Nominal Specifications:

For use with asphaltic shingles, metal, slate, wood, and most other roof systems.²


- **Roll size:** 3.5 squares (350 sq. ft. [32.5m²]) (excludes laps)
- **Roll width:** 42" (1.07 m)
- **Roll length:** 100' (30.48 m)
- **Approx. roll weight:** 53 lb. (24 kg)
- **UV exposure:** Resists UV degradation for up to 60 days³
- **Storage:** Do **NOT** double stack pallets. Always protect from moisture, sunlight, and extreme temperatures during storage.

Code Approvals and Standards:

- Meets or exceeds the physical requirements of ASTM D146, D226 Type II, D828, and D4869 Type IV, D6757 Type I or Type II
- Component of a UL Listed ANSI/UL 790 Class A system when used with UL Class A shingles. See UL Certifications Directory for ratings with other roof covering assemblies.¹
- ICC ESR-2053
- ICC AC-160
- Miami-Dade County Product Control approved
- State of Florida approved

Typical applications for combustible decks

Roof covering will determine actual assembly

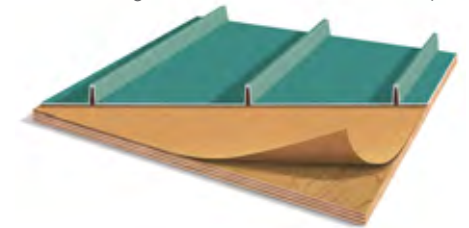

¹ Lifetime refers to the length of warranty coverage provided and means as long as the original individual owner(s) of a single-family detached residence [or eligible second owner(s)] owns the property where the qualifying GAF products are installed. For other owners/structures, Lifetime coverage is not applicable. Lifetime coverage on shingles requires the use of GAF Lifetime Shingles only. See the *GAF Shingle & Accessory Limited Warranty* for complete coverage and restrictions. Visit gaf.com/LRS for qualifying GAF products. Lifetime coverage on shingles and accessories requires the use of any GAF Lifetime Shingle and at least 3 qualifying GAF Accessories. See the *GAF Roofing System Limited Warranty* for complete coverage and restrictions. For installations not eligible for the *GAF Roofing System Limited Warranty*, see the *GAF Shingle & Accessory Limited Warranty*. Visit gaf.com/LRS for qualifying GAF products.

² Always refer to Underwriters Laboratories Certifications Directory for actual roof system assemblies.

³ Contact GAF Technical Support at 1-800-766-3411 or visit gaf.com for acceptable non-asphaltic roofing systems and limited warranty coverage.

⁴ 60-day UV resistance refers to standardized testing conducted to ensure the product will not physically degrade when exposed to UV. It is NOT related to withstanding water, snow, or wind. While VersaShield® Fire-Resistant Roof Deck Protection is water resistant, it is NOT WATERPROOF. DO NOT USE VersaShield® Fire-Resistant Roof Deck Protection as a temporary roof to protect property or possessions.

We protect what matters most™

